

## PIVOT Product Information

Our Pivot Door system is virtually airtight making it the most highly sealed pivot door available. Glass sizes can be up to 15m<sup>2</sup> with the frame being only 20mm. Single, double & triple glazing can be accommodated.



### CHARACTERISTICS

#### Frames

- The slimmest profiles at only 19mm

#### Glazing

- Single, Double, Triple
- Panel size up to 15m<sup>2</sup> wide
- Sourced in Australia

#### Drainage

- Tracks designed to act as drains
- No strip drains required as built-in sub sills allow for water to be collected and drained.

#### Finishing

- Air craft grade aluminium in natural anodised in 25 microns
- Coloured anodising in Australia in numerous colours in 25 microns
- Powder coating in Australia in numerous colours
- Suitable for extreme environments with 15 year warranty

### FUNCTION

#### Pivot Mechanism

- Can be centrally located or offset

#### Maintenance

- Aluminium and stainless steel parts require minimal maintenance and can be done with ease with our removable tracks.
- Extreme reliability and durability keeps maintenance to a minimum.

### OPTIONS

#### Locks


- Various options available for locking mechanisms including electric locking.

#### Screens


- Any material can be fit to our profiles including timber, stone and steel panels

# PIVOT Configurations

Maximum glass panel sizes available




Endless fixed & pivoting configurations

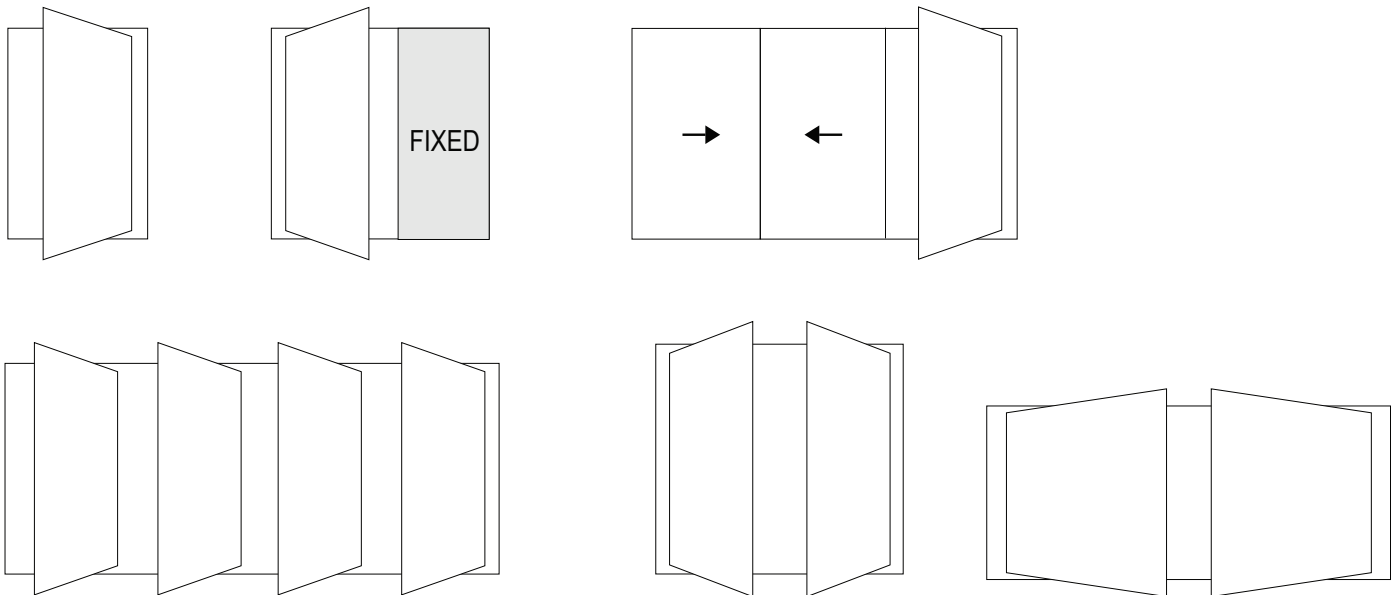


# PIVOT Configurations


Maximum glass panel sizes available



Endless fixed & pivoting configurations

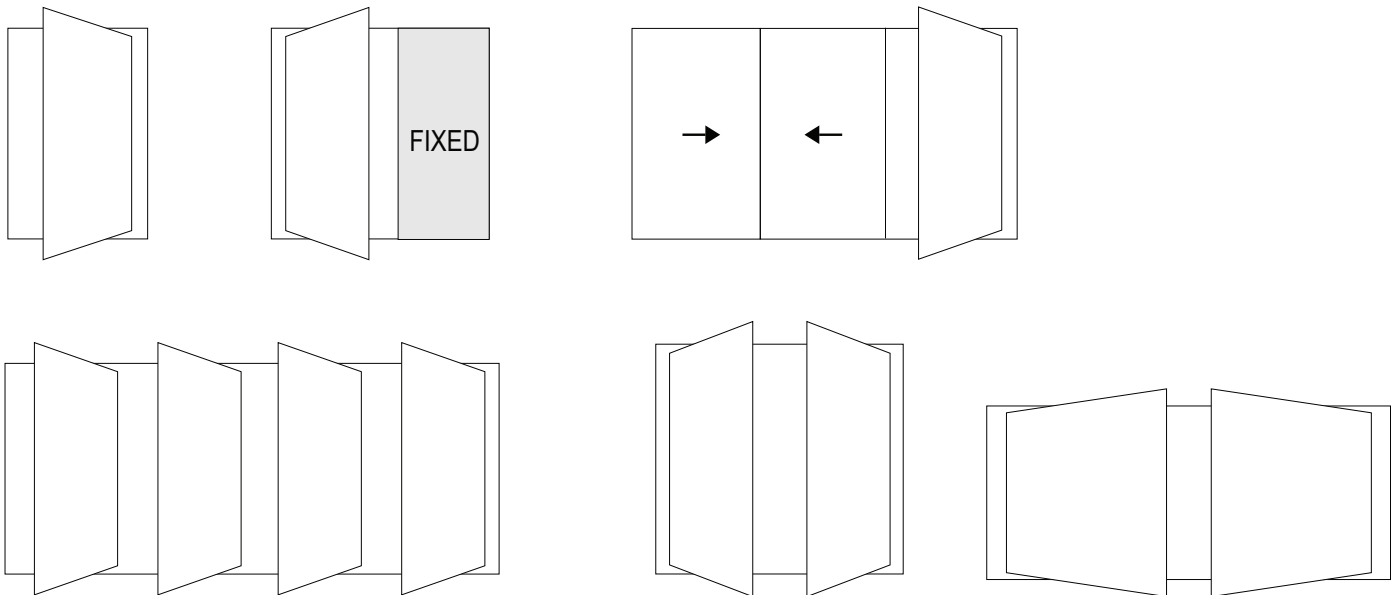



PIVOT  
Single Glazed  
Vitrocsa 3001

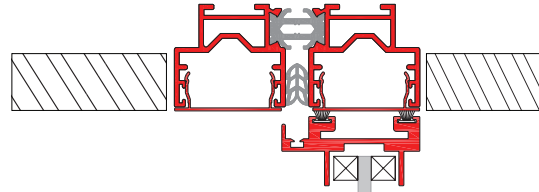

Int.

Ext.

Section

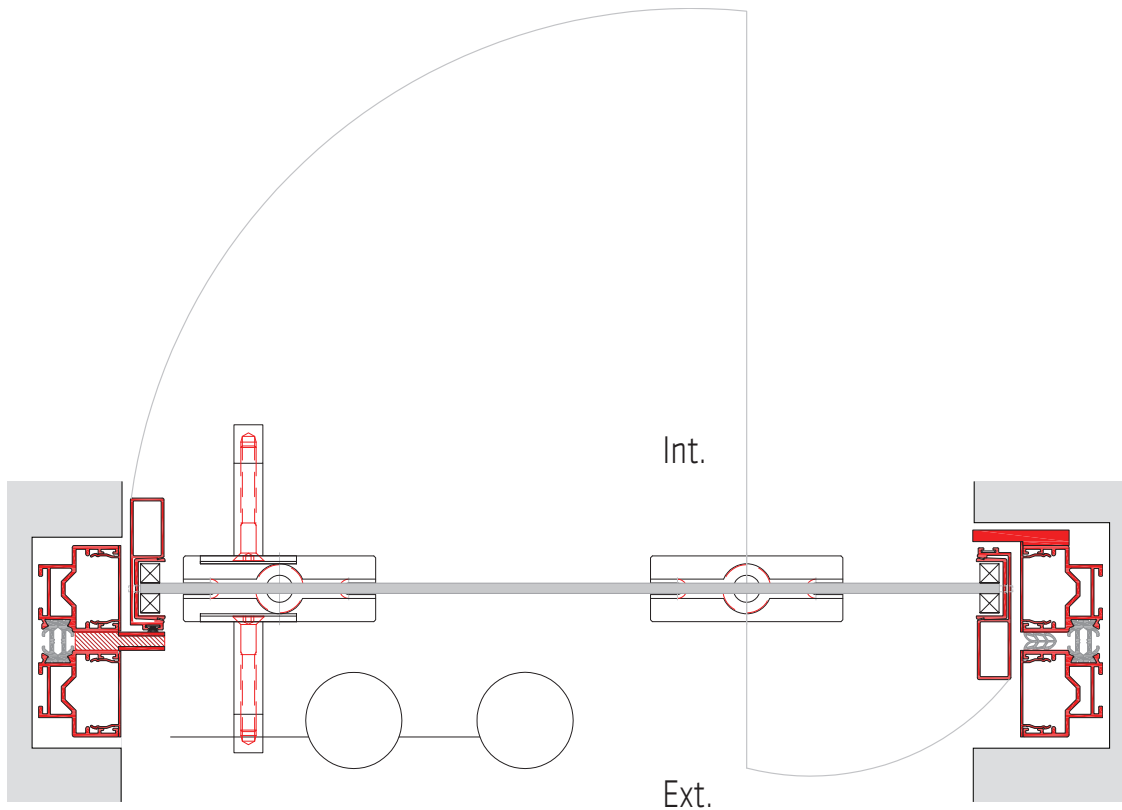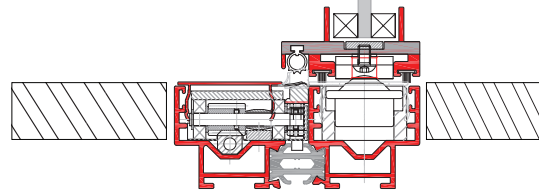


Int.


Ext.

Plan

PIVOT  
Double Glazed  
Vitrocsa TH+ Insulated

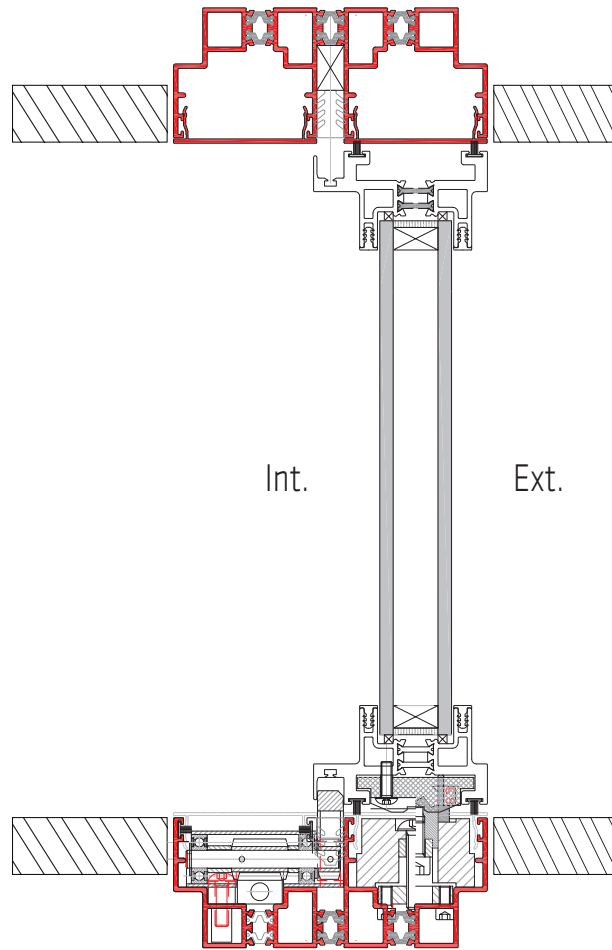

Section

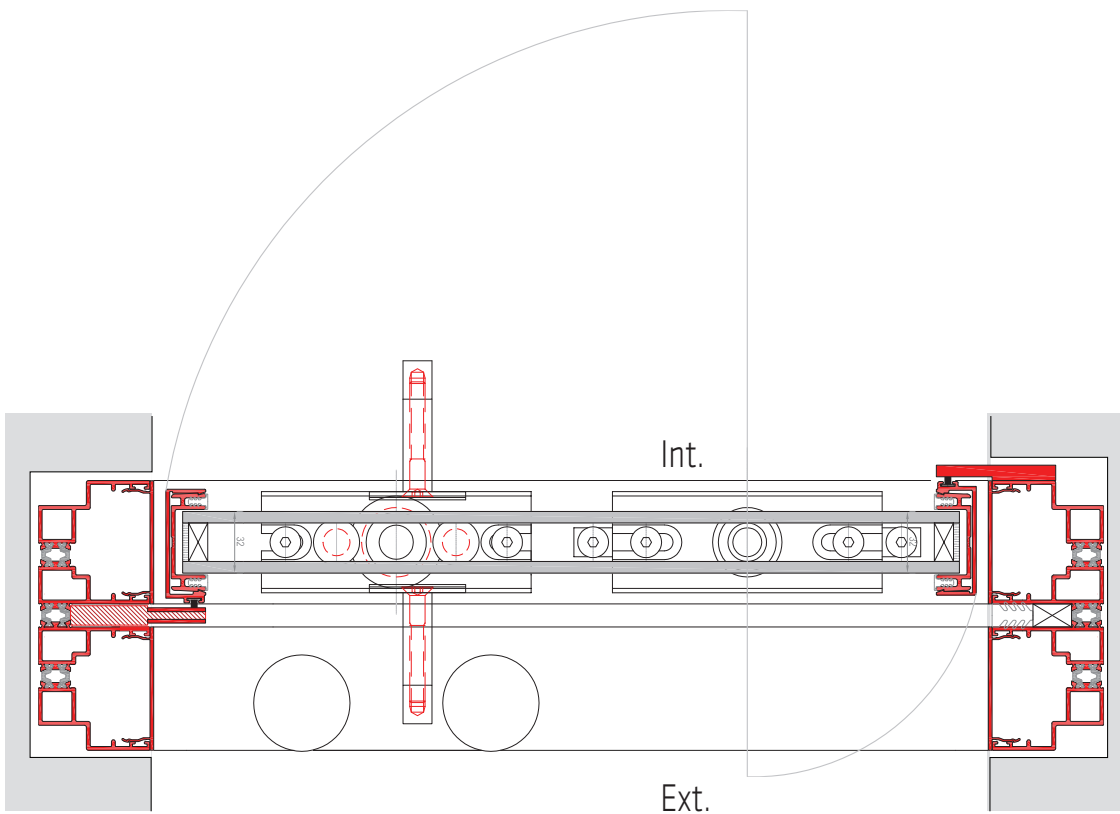

Plan